



# 1756-OB16D with 1492-TIFM40F-24-2

## 1756-OB16D MODULE A

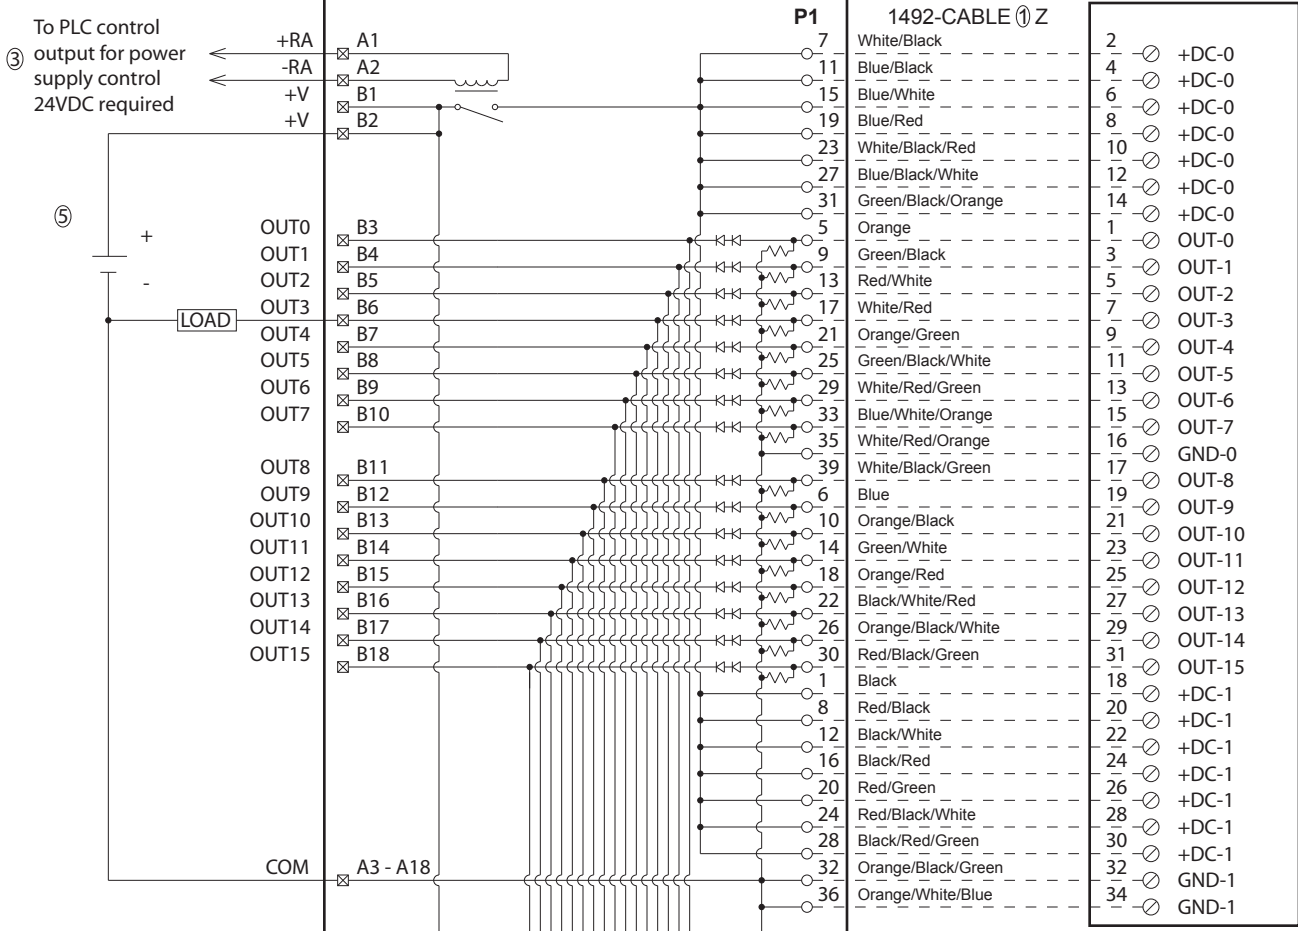

## 1756-OB16D MODULE B

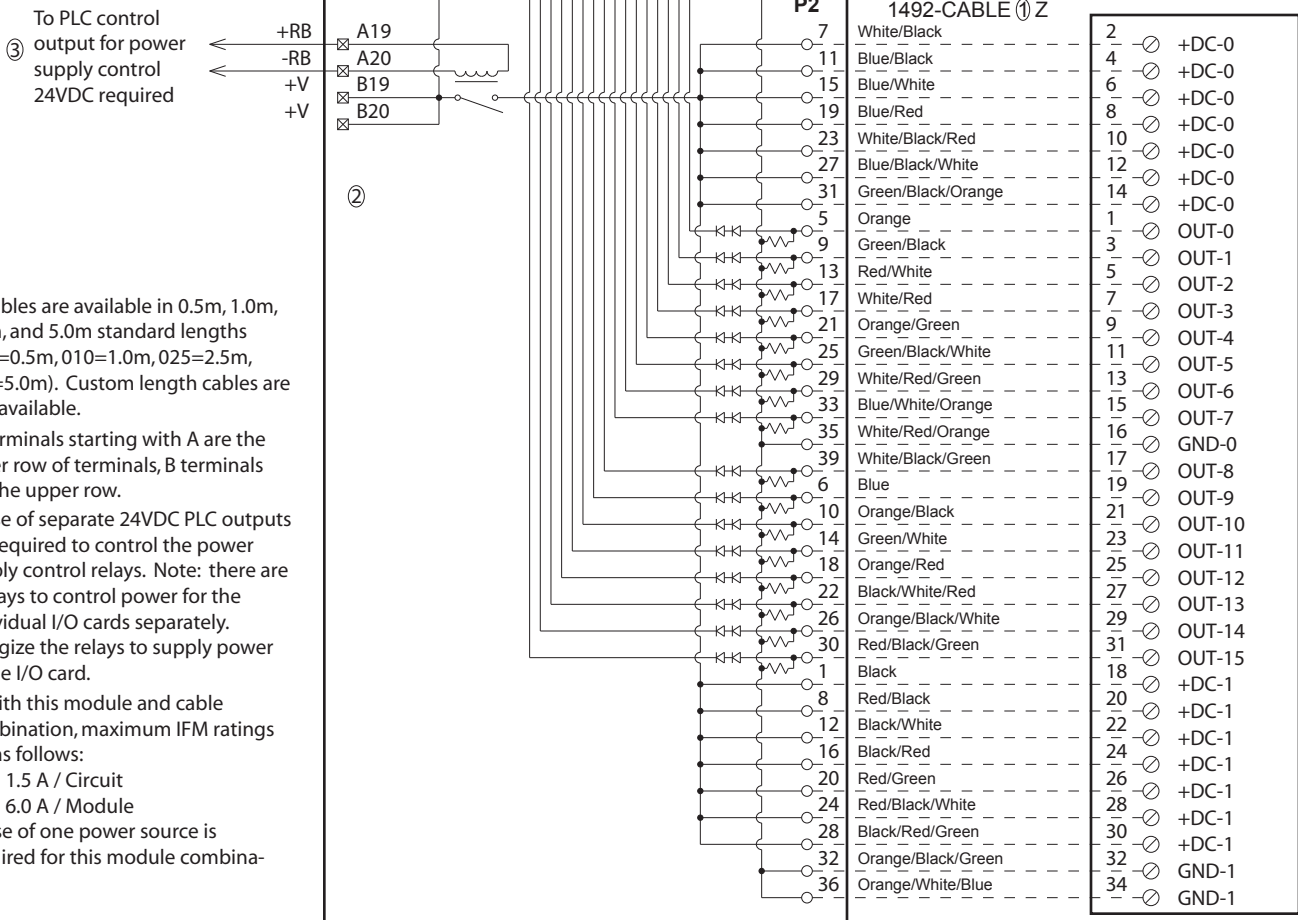

- ① Cables are available in 0.5m, 1.0m, 2.5m, and 5.0m standard lengths (005=0.5m, 010=1.0m, 025=2.5m, 050=5.0m). Custom length cables are also available.
- ② Terminals starting with A are the lower row of terminals, B terminals are the upper row.
- ③ Use of separate 24VDC PLC outputs are required to control the power supply control relays. Note: there are 2 relays to control power for the individual I/O cards separately. Energize the relays to supply power to the I/O card.
- ④ With this module and cable combination, maximum IFM ratings are as follows:  
1.5 A / Circuit  
6.0 A / Module
- ⑤ Use of one power source is required for this module combination.