


## EFFECTIVE, EASY-TO-INSTALL, STRONG

An innovative system consisting in a new frame, two horizontal rails and trim panels supplied according to the selected assembly: a modular concept to grant flexibility and a wide range of options.

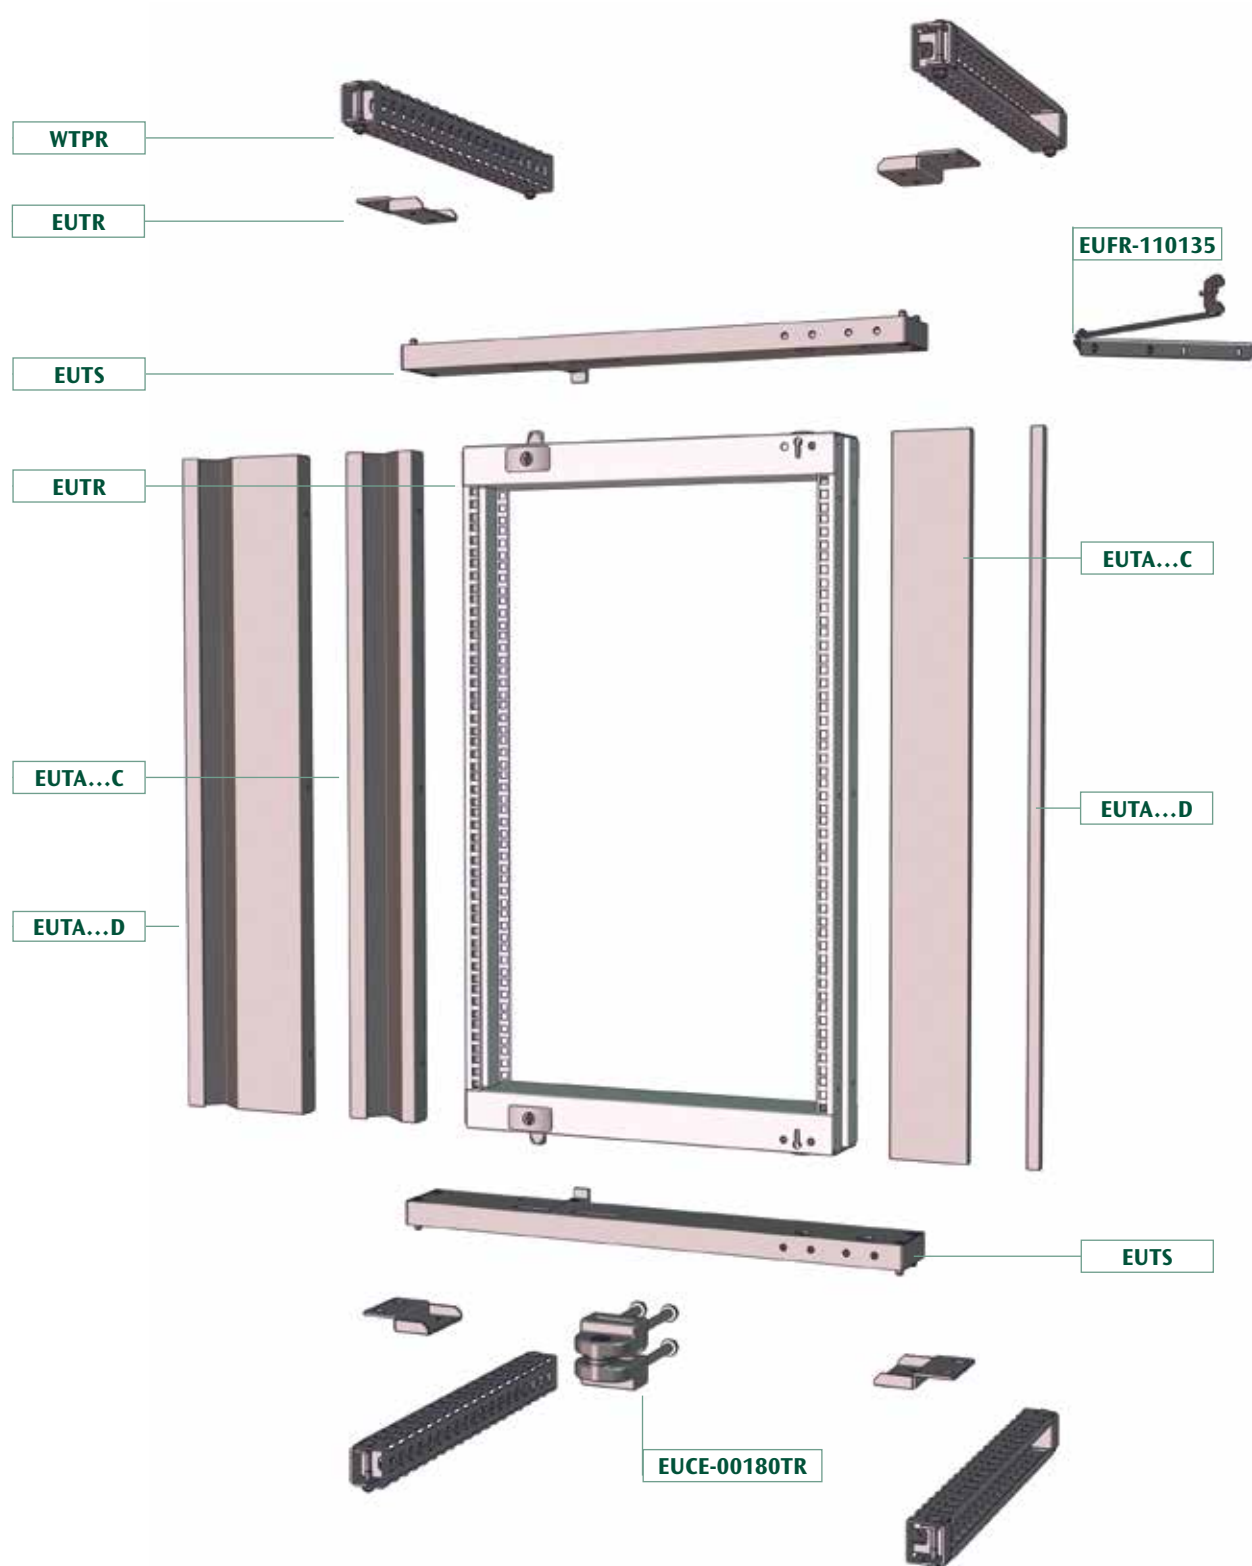

- Higher structural stiffness


HINGES	LOAD CAPACITY (*)
110°	1700 N
180°	1400 N

\* Load capacity for single cabinet. For cabinets joined in a suite, the load capacity can be increased by 60%

- Higher resistance to dynamic stress
- Easy to assemble
- No adjustments needed

- Deeper equipment can be installed

KIND OF RACK FRAME		MAX DEPTH OF THE EQUIPMENT 19"mm	
		W=600	W=800
CENTERED	110°	185	370
NOT CENTERED	180°	-	300
CENTERED	110°	-	485
NOT CENTERED	180°	-	415

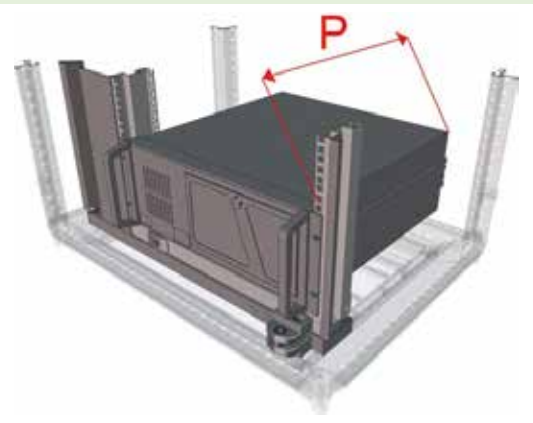

- New rotating system thanks to the new interchangeable 110° and 180° hinges
- 110° available for W=800mm too
- Partial frames with standard WTPR rails
- Solutions for special applications available (i.e. W=1200mm)
- It can be assembled with dividing panels and EU-KU-003 reinforcing brackets
- New rack stop options (90°, 110°, 135°) for top/bottom assembly

Rack 19"